


All Pages Of This Edition Approved


Signature: _____

Date: _____

REV.	DESCRIPTION	REVISER	DATE
A0	First Issue	LIUGONG	2017-8-8
A1	减少VA区尺寸，以减少漏光增加均匀度	LIUGONG	2017-12-9

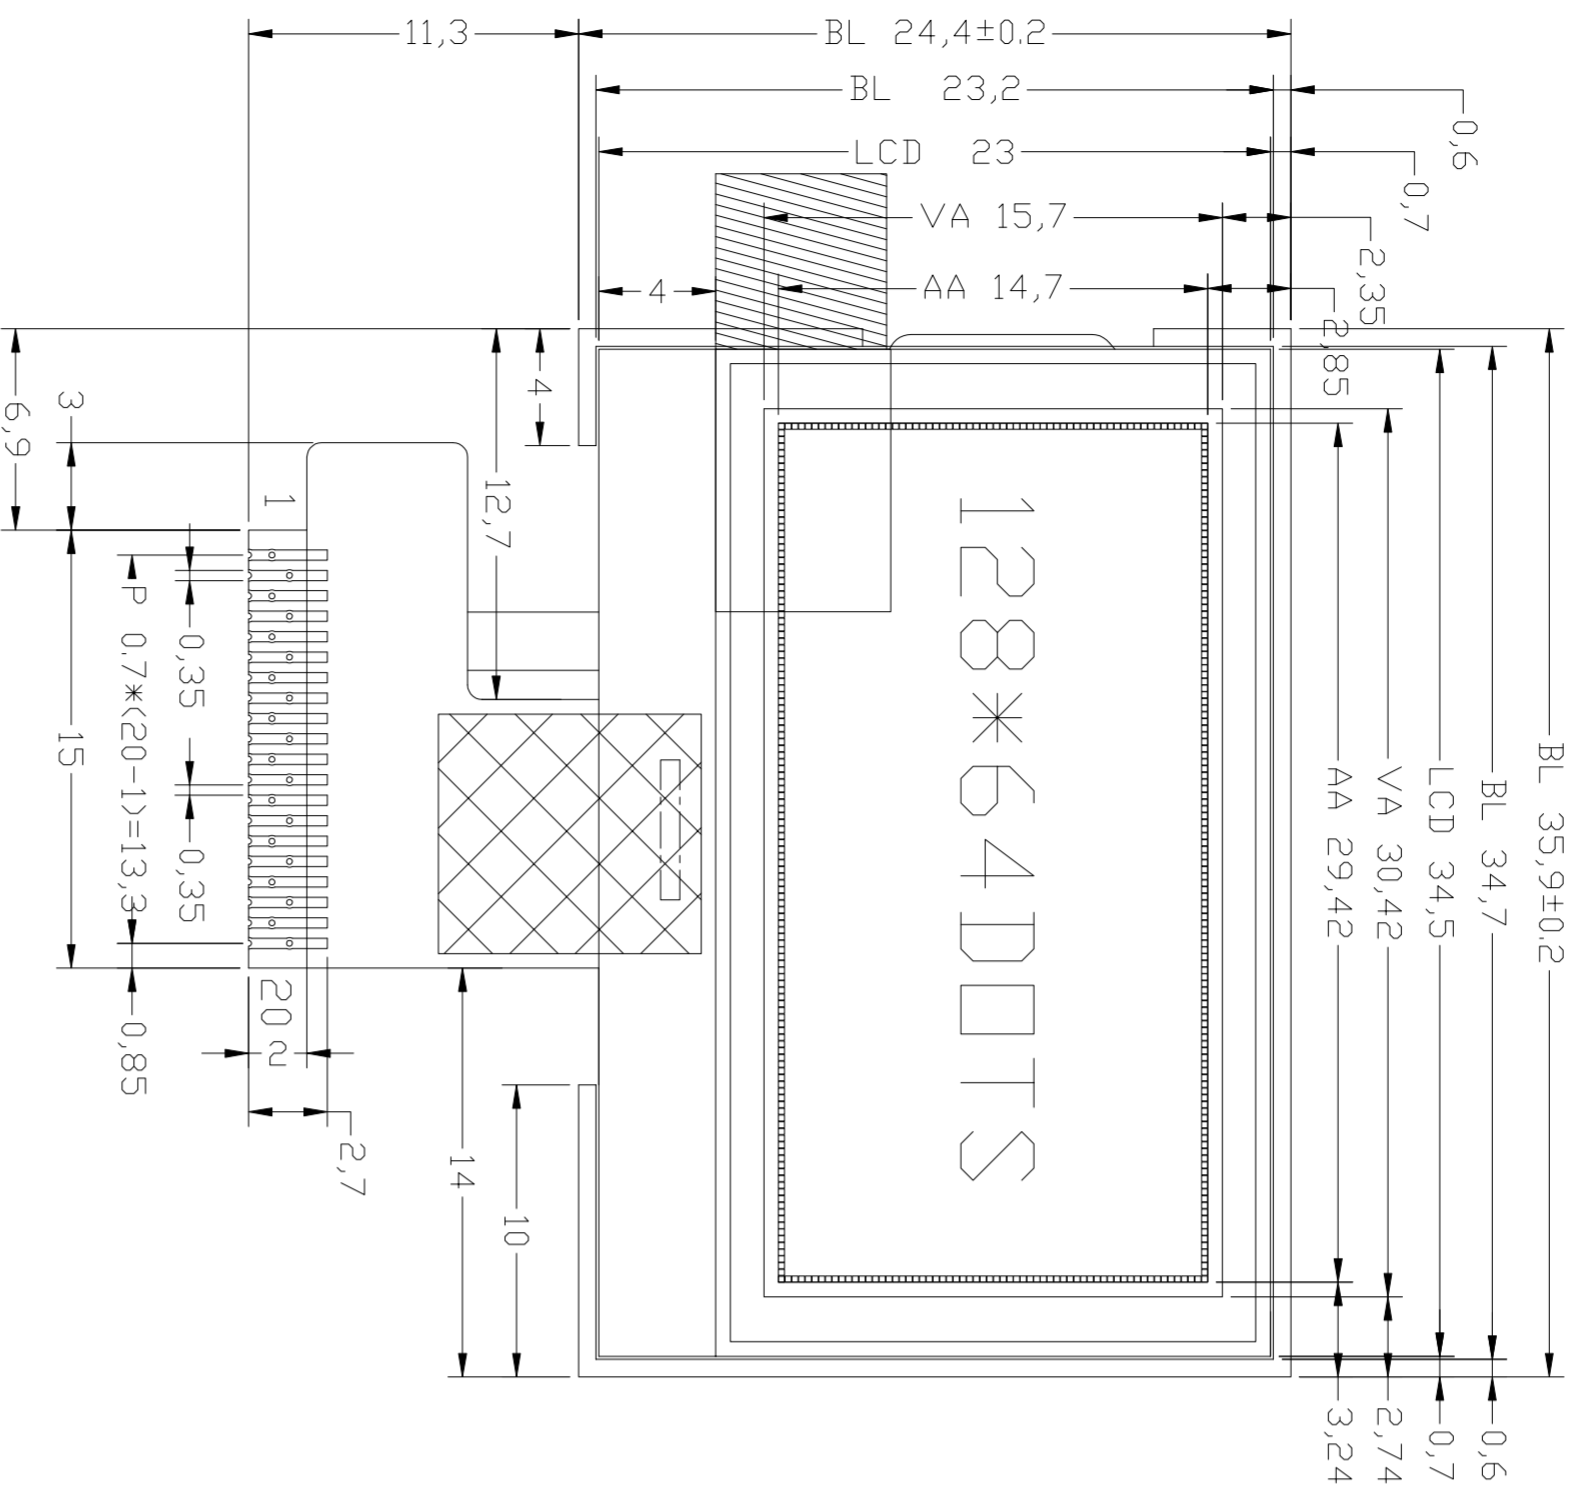

Front

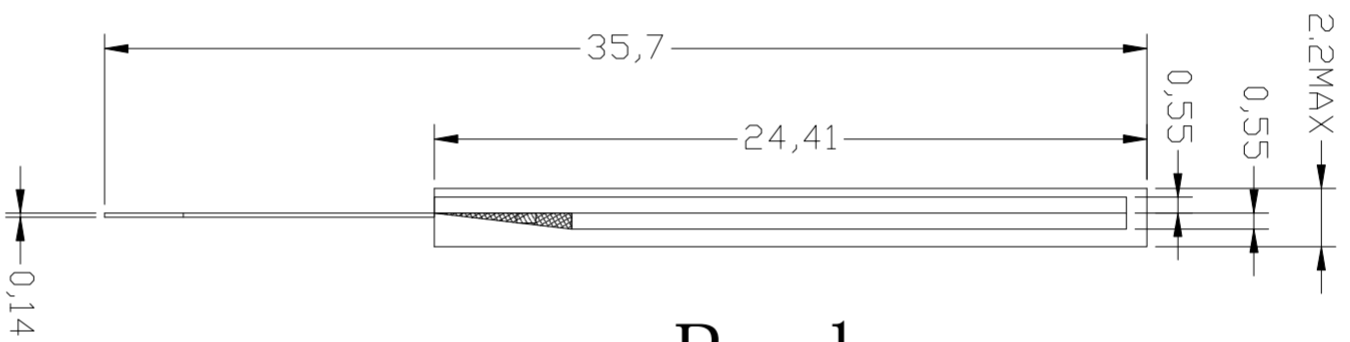



Back

VIEWING DIRECTION

Specifications:

1. Display Mode: DFSTN Transmissive/Negative.
2. Viewing Angle: 6 0'clock.
3. Drive Method: 1/64 Duty 1/9 Bias, Vop = 9.0V, Vdd = 3.3V.
4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
5. Connector: COG+FFPC.
6. Drive IC: ST7567
7. Backlight: 2pcs White die LED, 30mA.
8. Unassigned tolerances +/-0.20mm

TOP VIEW COM & SEG LAYOUT

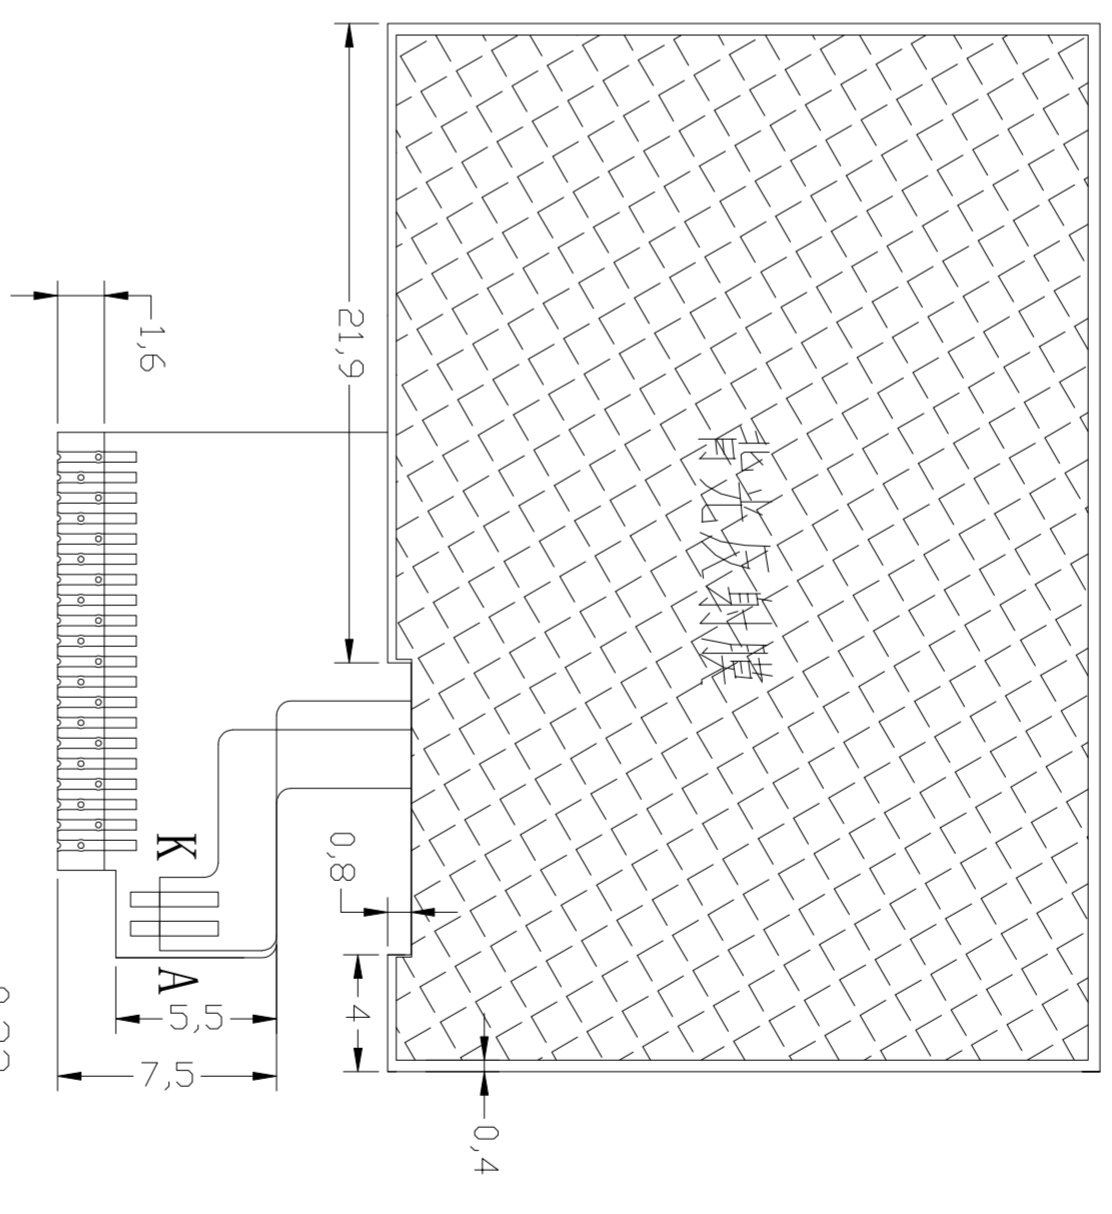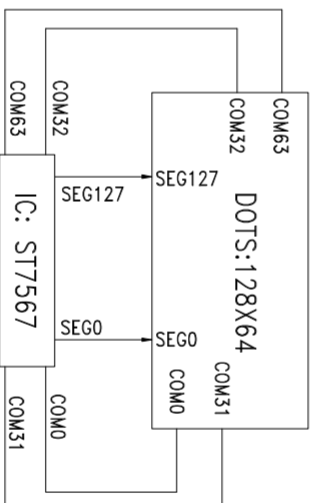

SCALE 20:1
DOTS SIZE

PIN	SYMBOL
1	N.C
2	XV0
3	V0
4	VG
5	VSS
6	N.C
7	N.C
8	VSS(K)
9	VDD(A)
10	N.C
11	N.C
12	N.C
13	CS
14	RES
15	A0
16	N.C
17	N.C
18	SCL
19	SDA
20	N.C

PANASSUS

MODEL NUMBER:

NM12864-550

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	2017-12-9
DESIGN BY:	liugong			
CHECKED BY:				
APPROVED BY:				
DO NOT SCALE THIS DRAWING.				
PROJECTION			NAME: LCM	
SHEET:			1 OF 1	