
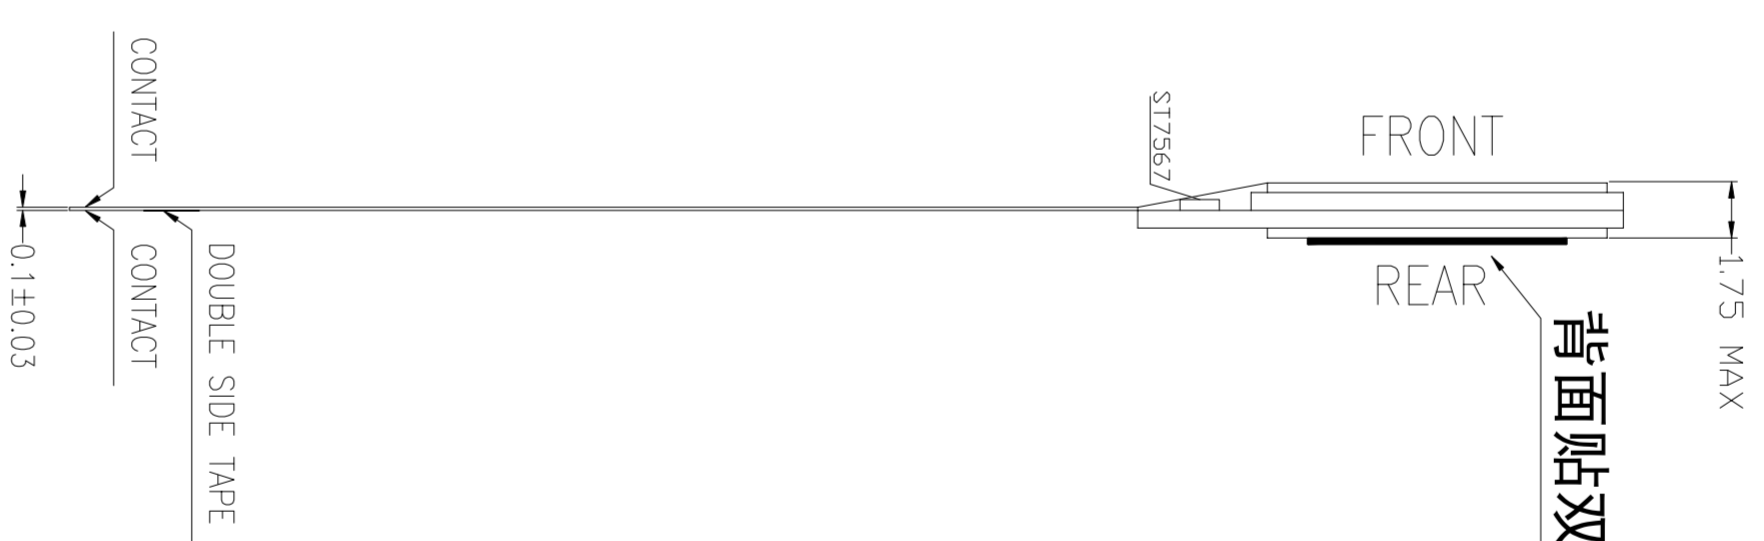
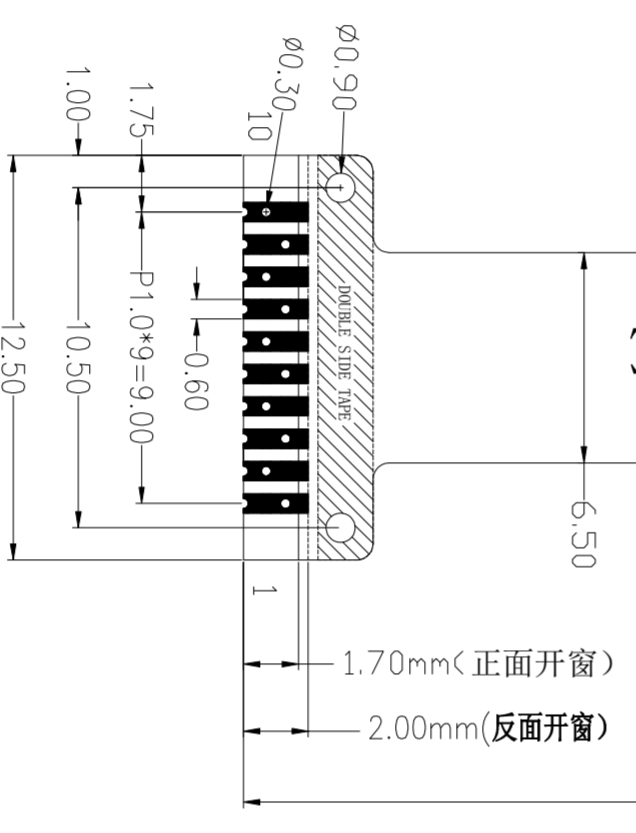



REV.	DESCRIPTION	REVISER	DATE
01	First issue	LJH	2015.6.10
01	fpc由35改33mm, 改黄绿膜色	LJH	2015.6.19

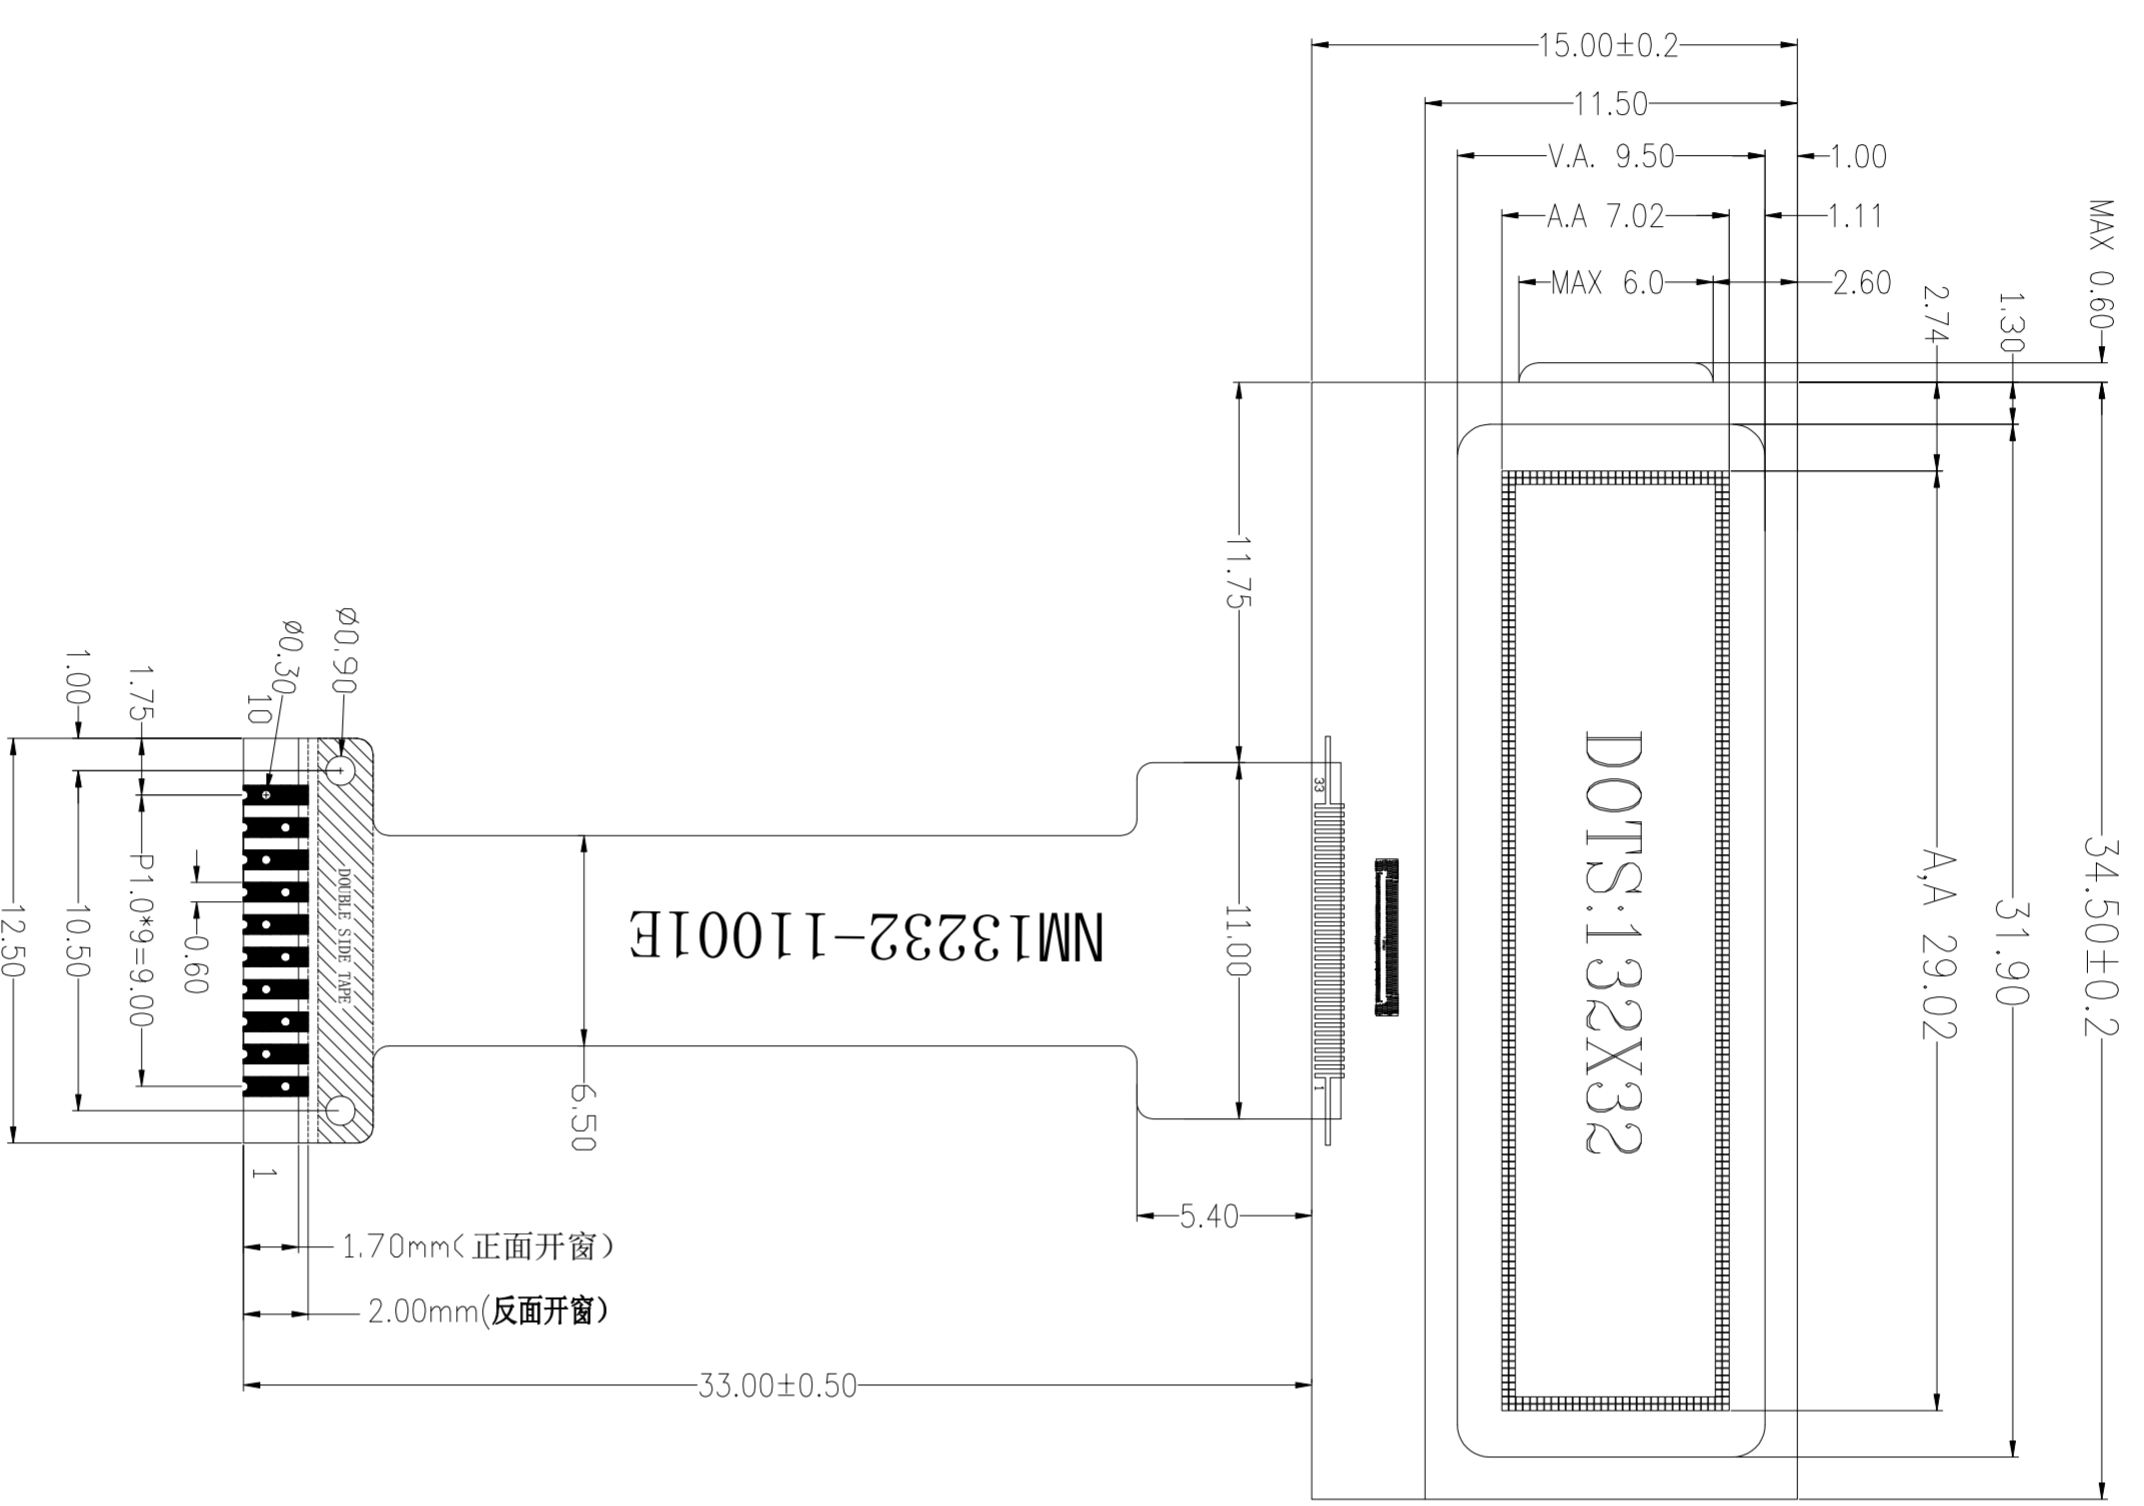

PIN	SYMBOL
1	CS1B
2	/RES
3	A0
4	D6(SCLK)
5	D7(SDA)
6	VDD
7	VSS
8	V0
9	XV0
10	VG

Specifications:

1. Display Mode: STN/YELLOW-GREEN, REFLECTIVE/Positive.
2. Viewing Angle: 6 0'clock.
3. Drive Method: 1/32 Duty 1/6 Bias, Vdd = 2.8-3.3V.
4. OPERATING TEMP: -10°C~+60°C, STORAGE TEMP: -20°C~+70°C.
5. Connector: COG+FPIC.
6. Drive IC: ST7567(or other compatible IC)
7. Backlight: /
8. RoHS Compliant: Yes.



SHEET: 1 of 1

APPROVALS DATE

DWN

CHK

APP

# PANASSYS

MODEL NUMBER :

SCALE:

GENERAL TOL: ± 0.2

DO NOT SCALE THIS DRAWING.

UNITS: MM